

RODDING EYES



Our systems can be used to solve draining problems in different industrial areas (hospitals, hotels, restaurants, chemical and pharmaceutical plants). Rodding eyes are manufactured in austenitic stainless grades AISI304 or AISI316. Edge finishing allows installation in different types of floor.

We offer rodding eyes for sewerage tubes from DN110.

* There are two available types of cover: **anti-slip (R)** and **smooth (G)**.

Symbol	Catalogue number	Dimensions [mm]	
		DN	
Rw 150/110	00.050110 - *	W	110
		H	150
Rw 200/110	00.05110 - *	DN	110
		W	200
		H	150
Rw 200/160	00.051160 - *	DN	160
		W	200
		H	140
Rw 250/160	00.052160 - *	DN	160
		W	250
		H	140
Rw 250/200	00.052200 - *	DN	200
		W	250
		H	140
Rw 300/160	00.053160 - *	DN	160
		W	300
		H	140
Rw 300/200	00.053200 - *	DN	200
		W	300
		H	140

RODDING EYES




ADVANTAGES

- high durability,
- isolating from foreign odors,
- easy installation,
- good fit with interior design.

INSTALLATION

1. Make sure the drain pipe is at the correct height.
2. During concrete pouring, the upper part should be 1-1,5 [mm] below floor level.

RODDING EYES

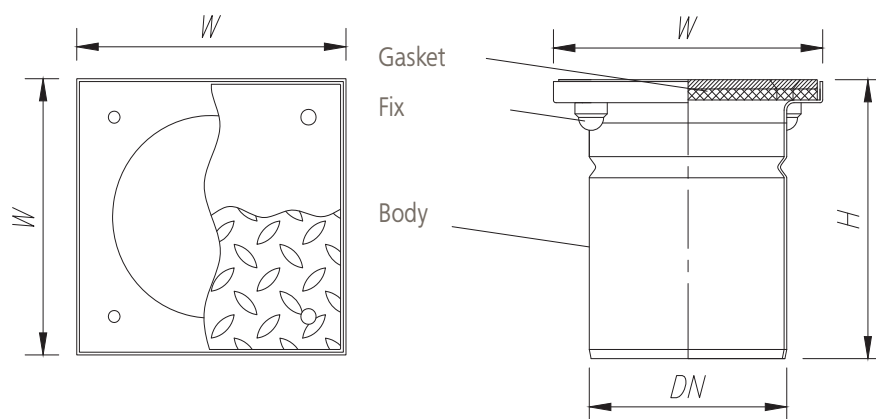

COVER TYPES

Anti-slip cover

Smooth cover



ANTI-SLIP COVER



SMOOTH COVER



RODDING EYES COMPONENTS

- body,
- screw lock cover,
- gasket.